



Area Light High Power



Description

The LITELUME™ Area Light High Power Series (LL-ALHP) combines style and performance. Featuring a diecast aluminum housing with outstanding corrosion protection, and secondary UV resistant polycarbonate optics. Compact in design low profile 3G vibration rated. The ALHP provides an aesthetically pleasing addition to any roadway or parking lot with its steady well defined construction. The highly functioning optics provide maximum lumen output and light distribution to make the ALHP the premier outdoor area light.

Fixture Information

Size:	350W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Gray (GY)
Mounting:	Pole Mount Slip Fitter Wall Mount
Lens:	Polycarbonate
Power Factor:	.90 or greater
CRI:	80
Operating Temperature:	-40°F to 113°F
Surge Protector:	10 kVA
Voltage:	Standard: 120-277V Optional: 347-480V
Sensor:	Standard: No sensor Custom: Bi-level motion sensor w/ Remote control Twist Lock Photocell and Receptacle (120-277V) and Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

49,350 to 51,100 lm

Lumens Per Watt (typical):

142 to 149 lm/W

CCT:

4000K
5000K

Distribution

Type III
Type IV
Type V

Lifespan:

Features Philip Lumileds with up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
IP66 rated




Wattage Replacement

Existing Watts	Litelume Watts
1000W	350W




Dimension

Item	Width	Length	Height	Weight
300W Slipfitter	13.39"	33.5"	3.15"	24.51 lb
300W Pole Mount	13.39"	31.48"	6.97"	24.09 lb
300W Wall Mount	13.39"	31.78"	7.99"	26.96 lb

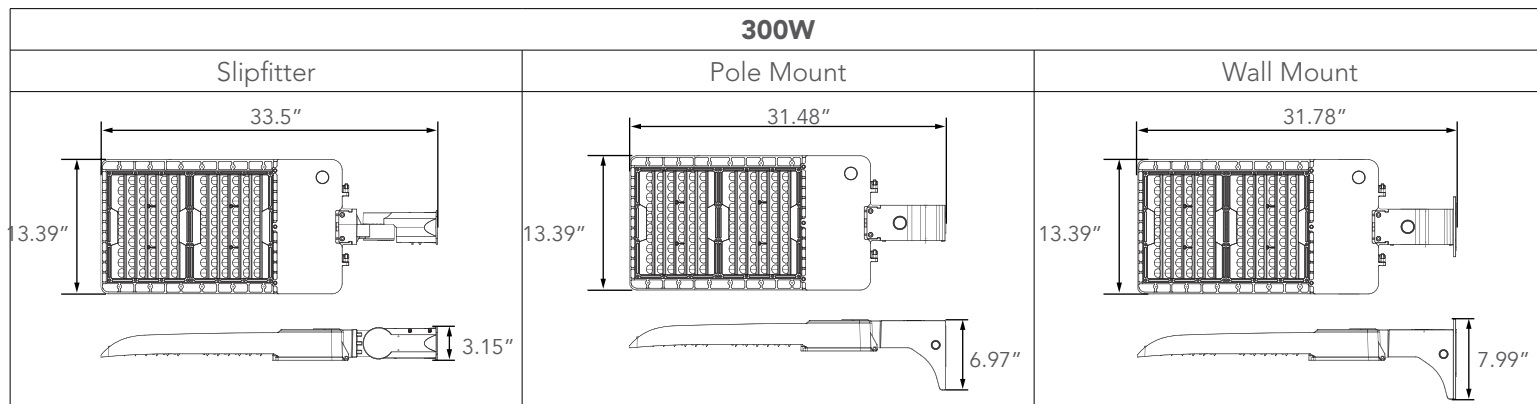


Photometrics

Type 3



Type 4



Type 5

